
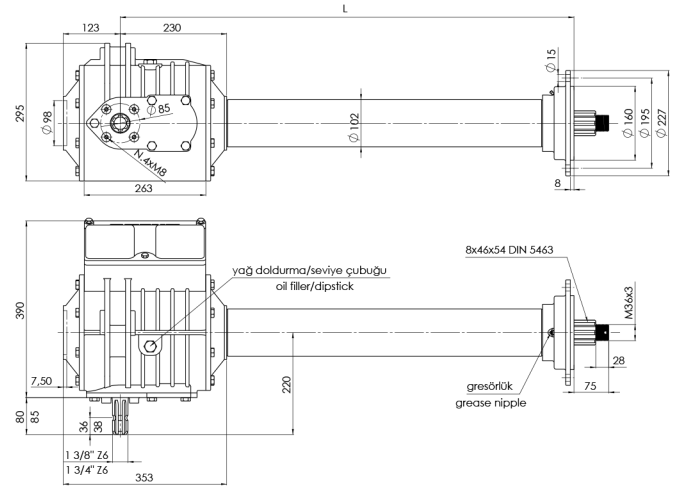


DS006

ROTOVATÖR


ROTARY TILLER

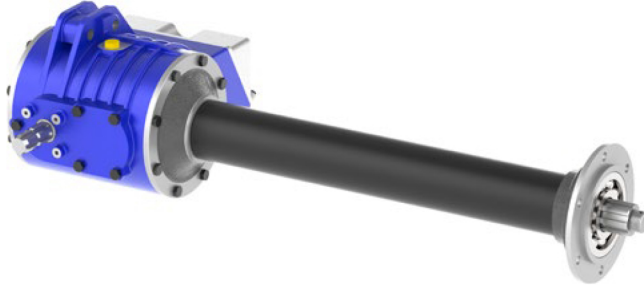

ÖZELLİKLER / SPECIFICATIONS

Vites / Gearshift	1. Vites First Gear	2. Vites Second Gear	3. Vites Third Gear	4. Vites Fourth Gear
Dişli Düzeni / Gear Arrangement	23-18	21-19	19-21	18-23
i Çevrim Oranı / Gear Ratio	2,64 : 1	2,28 : 1	1,87 : 1	1,62 : 1
n ₁ Giriş Devri / Input Speed	540 r.p.m.			
n ₂ Çıkış Devri / Output Speed	204 r.p.m.	236 r.p.m.	288 r.p.m.	333 r.p.m.
P ₁ Giriş Gücü / Input Power	70 HP / 52 kW			
M ₂ Çıkış Torku / Output Torque	2323 Nm	2008 Nm	1645 Nm	1423 Nm
Yağ Cinsi / Oil Grade	SAE 90 / SAE 140			
V Yağ Hacmi / Oil Volume	5 Lt.			
A Kullanım Alanı / Usage Area	Rotovator / Rotary Tiller			
L İsteğinize göre üretilebilir / Producibile according to the your request				

Dişli Düzeni GEAR ARRANGEMENT



Rotovator / Rotary Tiller	
Çalışma Genişliği Working Width	L
210 cm	1050 mm
235 cm	1175 mm