
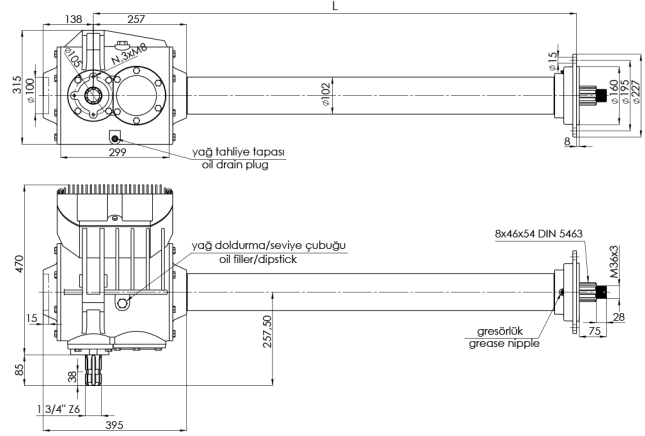


DS007

ROTOVATÖR


ROTARY TILLER

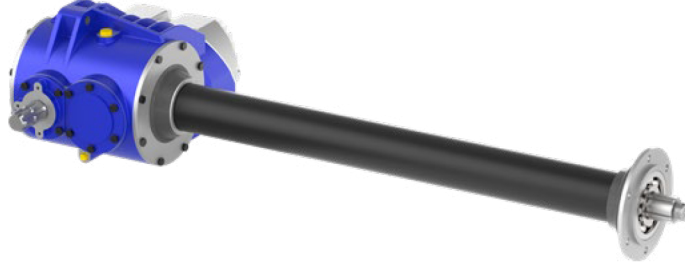

ÖZELLİKLER / SPECIFICATIONS

Vites / Gearshift	1. Vites First Gear	2. Vites Second Gear	3. Vites Third Gear	4. Vites Fourth Gear
Dişli Düzeni / Gear Arrangement	21-17	20-19	19-20	17-21
i Çevrim Oranı / Gear Ratio	2,66 : 1	2,26 : 1	2,04 : 1	1,74 : 1
n ₁ Giriş Devri / Input Speed	540 r.p.m.			
n ₂ Çıkış Devri / Output Speed	203 r.p.m.	238 r.p.m.	264 r.p.m.	310 r.p.m.
P ₁ Giriş Gücü / Input Power	110 HP / 82 kW			
M ₂ Çıkış Torku / Output Torque	3667 Nm	3128 Nm	2820 Nm	2400 Nm
Yağ Cinsi / Oil Grade	SAE 90 / SAE 140			
V Yağ Hacmi / Oil Volume	7 Lt.			
A Kullanım Alanı / Usage Area	Rotovator / Rotary Tiller			
L İsteğinize göre üretilebilir / Producible according to the your request				

Dişli Düzeni GEAR ARRANGEMENT



giriş/input

çıkış/output

Rotovator / Rotary Tiller	
Çalışma Genişliği Working Width	L
275 cm	1375 mm
300 cm	1500 mm