


DS010


ROTOVATÖR ROTARY TILLER

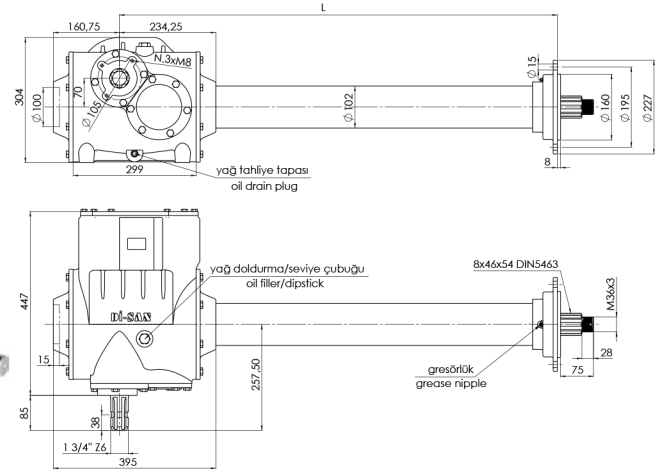

ÖZELLİKLER / SPECIFICATIONS

	Vites / Gearshift	1. Vites First Gear	2. Vites Second Gear	3. Vites Third Gear	4. Vites Fourth Gear
	Dişli Düzeni / Gear Arrangement	21-17	20-19	19-20	17-21
i	Çevrim Oranı / Gear Ratio	2,66 : 1	2,26 : 1	2,04 : 1	1,74 : 1
n ₁	Giriş Devri / Input Speed	540 r.p.m.			
n ₂	Çıkış Devri / Output Speed	203 r.p.m.	238 r.p.m.	264 r.p.m.	310 r.p.m.
P ₁	Giriş Gücü / Input Power	130 HP / 97 kW			
M ₂	Çıkış Torkü / Output Torque	4338 Nm	3700 Nm	3335 Nm	2840 Nm
SAE 90	Yağ Cinsi / Oil Grade	SAE 90 / SAE 140			
V	Yağ Hacmi / Oil Volume	7 Lt.			
A	Kullanım Alanı / Usage Area	Rotovator / Rotary Tiller			
L	İsteğinize göre üretilebilir / Produçible according to the your request				

Dişli DÜZENİ GEAR ARRANGEMENT



giriş/input

çıkış/output

Rotovator / Rotary Tiller

Çalışma Geniřlięi Working Width	L
350 cm	1750 mm
400 cm	2000 mm