
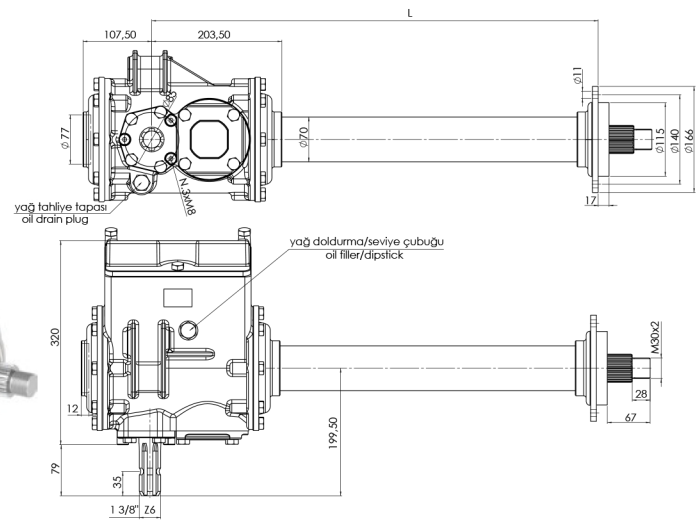


ROTOVATÖR
ROTARY TILLER

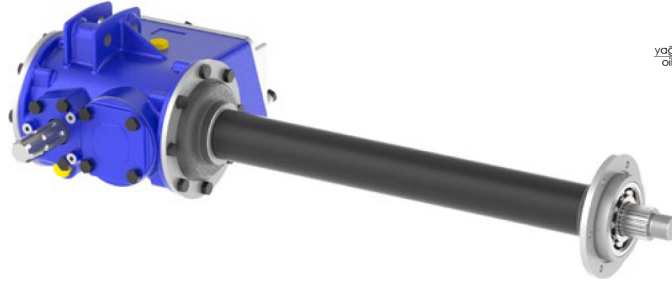


ÖZELLİKLER / SPECIFICATIONS

	Vites / Gearshift	1. Vites First Gear	2. Vites Second Gear	3. Vites Third Gear	4. Vites Fourth Gear
	Dişli Düzeni / Gear Arrangement	21-17	20-18	18-20	17-21
i	Çevrim Oranı / Gear Ratio	2,03 : 1	1,82 : 1	1,48 : 1	1,33 : 1
n ₁	Giriş Devri / Input Speed	540 r.p.m.			
n ₂	Çıkış Devri / Output Speed	266 r.p.m.	296 r.p.m.	365 r.p.m.	406 r.p.m.
P ₁	Giriş Gücü / Input Power	40 HP / 30 kW			
M ₂	Çıkış Torku / Output Torque	1017 Nm	914 Nm	741 Nm	666 Nm
⚙	Yağ Cinsi / Oil Grade	SAE 90 / SAE 140			
V	Yağ Hacmi / Oil Volume	3,50 Lt.			
A	Kullanım Alanı / Usage Area	Rotovator / Rotary Tiller			
L	İsteğinize göre üretilebilir / Producible according to the your request				

DIŞLI DÜZENİ

GEAR ARRANGEMENT



çıkış/output

Rotovator / Rotary Tiller	
Çalışma Genişliği Working Width	L
120 cm	600 mm
140 cm	700 mm
160 cm	800 mm
180 cm	900 mm